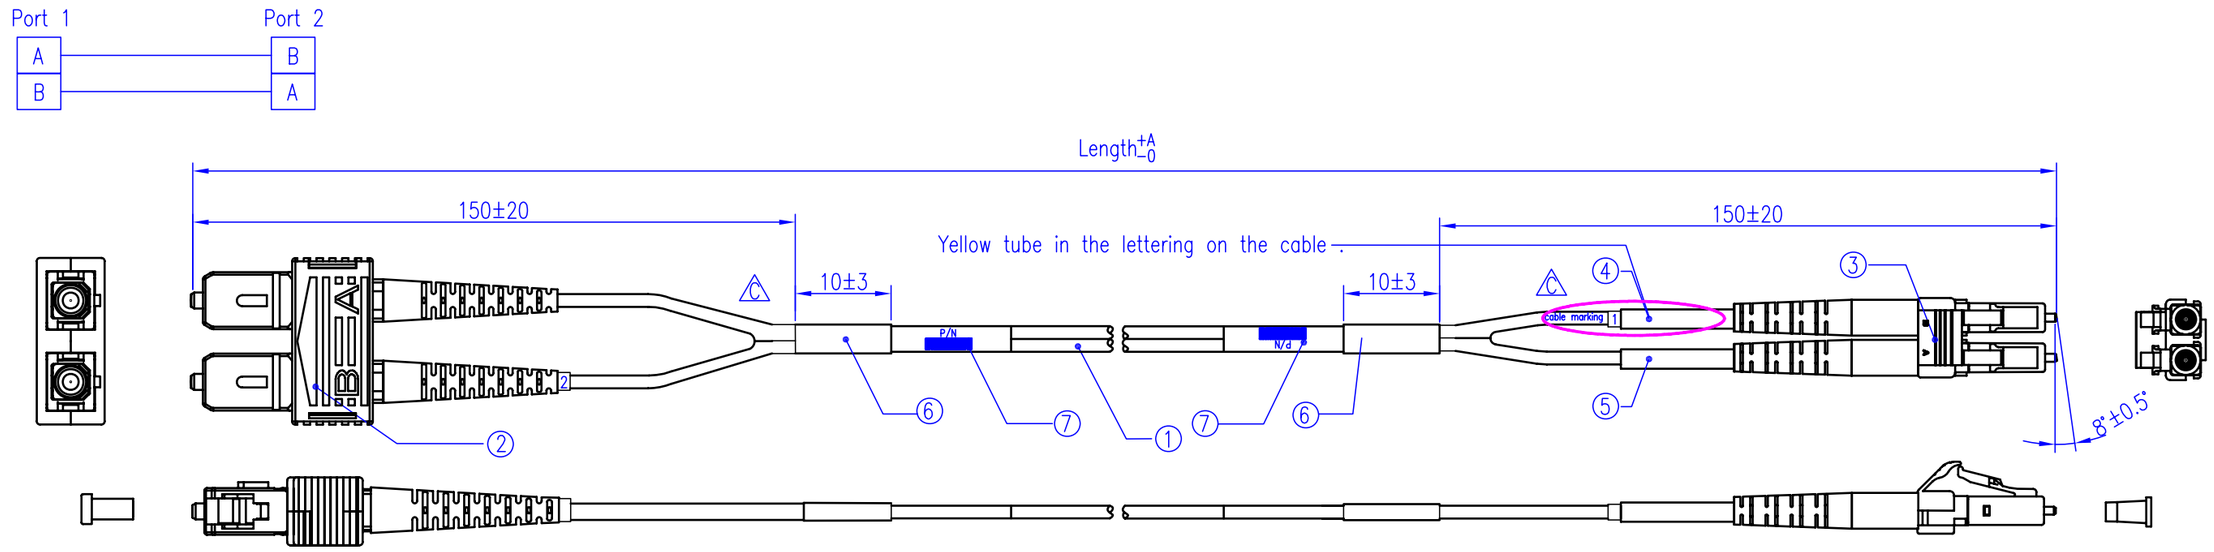





Notes:
1.0. Insertion Loss: <=0.25dB (1310nm)
2.0. Return Loss: >=55dB (1310nm)
APC: >=60dB (1310nm)

Notes: 1. Width: 25mm, Length: 26mm.
2. TOTAL CABLE SOLUTIONS P/N
3. Bar Code: Code 128 Auto
Print: xyyyyyzzzz
4. S/N: xyyyyyzzzzz, e.g. A0839300001.
X: manufacture location.
yyyyy: Internal work order code.
zzzzz: Incrementing seral code.

C

Tolerance

| | |
|---|---|
| L>100 | 1% |
| 50<=L<=100 | 1.00 |
| 30<=L<50 | 0.18 |
| 10<=L<30 | 0.16 |
| 3<=L<10 | 0.14 |
| 1<=L<3 | 0.12 |
| 0.3<=L<1 | 10% |
| L<0.3 | 0.03 |
| LENGTH(M) | A(M) |

TABLE A

| ITEM# | QTY | DESCRIPTION |
|---|---|---|
| 7 | A/R | CABLE LABEL, WRAPPED TIGHTLY AROUND. |
| 6 | A/R | HEAT SHRINK TUBE, BLACK |
| 5 | A/R | TUBE, WHITE |
| 4 | A/R | TUBE, YELLOW |
| 3 | 1 | **CONNECTOR, LC/APC, CONE, DUPLEX, SINGLE-MODE, GREEN COUPLING & BOOTS** |
| 2 | 1 | CONNECTOR, SC, DUPLEX, SINGLE-MODE, BLUE COUPLING & BOOTS. |
| 1 | A/R | CABLE, OPTICAL FIBER, SINGLE-MODE, G657A, 9/125, DUPLEX, ø2.0mm, TIGHT, YELLOW, PVC JACKET. |

PARTS LIST

TABLE B

| | |
|---|---|
| TCS P/N | |
| D-LA2SU2-SR2-xxxM | |
| NOTE: "xxx" = 3-DIGIT LENGTH | LENGTH(M) |

MATL NOTES
FINISH NOTES
SHEET 1 OF 1
UNIT mm

DRAWN HOSKINS DATE
DESIGN DATE
CHECKED HOSKINS DATE
APPROVED HOSKINS DATE

TOTAL CABLE SOLUTIONS

TITLE PATCHCORD, SC/UPC-LC/APC, SM DUPLEX, 9/125, G657A, ø2.0

SIZE A3
DRAWING NO. D-LA2SU2-SR2-xxxM
REV. C